



The  
Patent  
Office

PCT/GB 99 / 0 3 0 8 5

09/162870



GB 99 / 3085

REC'D 25 OCT 1999

INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

WIPO

PCT

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ


4

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

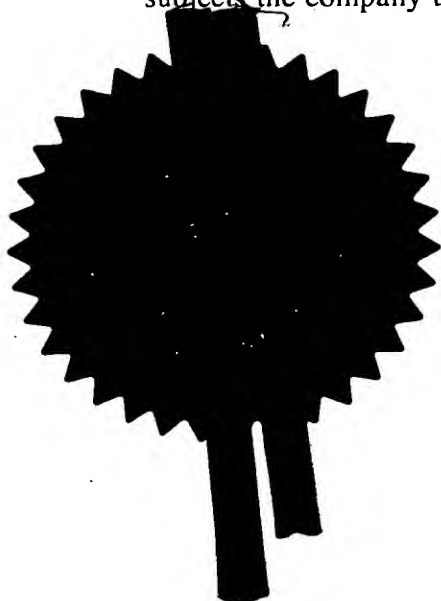


Signed

Dated

15 OCT 1999

**THIS PAGE BLANK (USPTO)**

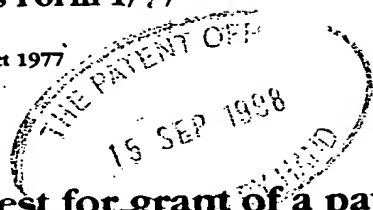

# Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

BP-08-1271

2. Patent application number

(The Patent Office will fill in this part)

filed herewith

15 SEP 1998

9820124.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

The Morgan Crucible Company plc  
Morgan House,  
Madeira Walk,  
Windsor,  
Berkshire SL4 1EP

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

5808514002

4. Title of the invention

BONDED FIBROUS MATERIALS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Phillips & Leigh  
7 Staple Inn,  
Holborn,  
London WC1W 7QF.

Patents ADP number (if you know it)

1289001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	12
Claim(s)	4
Abstract	-
Drawing(s)	-

10. If you are also filing any of the following, state how many against each item.

## Priority documents

Translations of priority documents	
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	<del>Yes</del>
Request for preliminary examination and search (Patents Form 9/77)	Yes
Request for substantive examination (Patents Form 10/77)	Yes

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Phillips & Leigh*

Date 15.9.98

Phillips & Leigh  
Agents for the Applicants

12. Name and daytime telephone number of person to contact in the United Kingdom

J.C. Boff - 0171 405 0133

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## BONDED FIBROUS MATERIALS

As invention relates to bonded fibrous materials and is particularly applicable to materials comprising saline soluble fibres bonded with a binder.

5

Refractory ceramic fibres (RCF) are well known materials and typically comprise an aluminosilicate inorganic fibre formed from an oxide melt which is spun, blown, drawn, or otherwise formed into fibres. Such RCF fibres are used in the manufacture of various industrial and domestic articles. Typical uses of RCF are for applications in which resistance to temperatures in excess of 800°C is required.

10

Much RCF fibre is used in the form of needled blankets of fibre in which structural integrity is provided by the fibres that are tangled together in the needling process. (Such products are known as "blanket"). Sometimes a binder is used to lock the fibres together subsequent to exposure to high temperature. Blanket can be processed further to form cut shapes or folded to form insulating modules.

15

RCF fibre is also used in the production of so-called "Converted Products". Converted products comprise materials in which the RCF is processed further to provide materials in which the RCF is present as either a minor or major constituent. Typical converted products include the following:-

20

"Board" – substantially rigid flat sheets containing inorganic and/or organic binders produced by a wet process (for example made by dehydrating a suspension of RCF and binders);

25

"Paper" – a flexible fibrous insulating material with a thickness of less than or equal to 6mm, formed on paper making machinery (for example RCF in sheet form with a binder);

"Shapes" – substantially rigid shapes made of ceramic fibre with the addition of inorganic and/or organic binder, fired or unfired (for example, RCF formed by vacuum forming into a variety of shapes);

30

"Fire shapes" – RCF formed by a vacuum forming route and used for domestic and industrial fires either as radiant bodies or for decorative appearance;

“Castables” – ceramic fibre with inorganic and/or organic binder which may be cast (for example, RCF in the form of cements, concretes and mortars);

“Mastics” – A mouldable material containing RCF with binders and which may be trowelled, hand moulded, or dispensed from a pressure gun and which sets upon drying/heating;

“Extrusion” - A mastic-like material that may be used in the manufacture of extruded sections and tubes;

“Textiles” – ceramic fibre which has been woven with or without the addition of other filaments, wires, or yarns (for example, RCF formed into rope, yarn, mats and the like by textile technology).

In many of the above mentioned applications binders are used. There are two broad classes of binders:-

“Organic binders” – which serve to improve the handling characteristics of the product concerned at low temperatures but which burn off at higher temperatures. Organic binders include, for example, such materials as starch.

“Inorganic binders” – which may be effective to improve the handling characteristics of the product concerned at low temperatures, but which also give integrity to the product after exposure to high temperatures. Inorganic binders include, for example, such materials as colloidal silicas, aluminas, and clays.

All of the above materials and concepts are well known in the refractory industry.

Although extremely useful, RCF is an inorganic fibrous material. Inorganic fibrous materials can be either glassy or crystalline. Asbestos is an inorganic fibrous material one form of which has been strongly implicated in respiratory disease.

It is still not clear what the causative mechanism is that relates some asbestos with disease but some researchers believe that the mechanism is mechanical and size related. Asbestos of a sub-micron size can pierce cells in the body and so, through long and repeated cell injury, have a bad effect on health. Whether this mechanism is true or not regulatory agencies have indicated a desire to categorise any inorganic fibre product that has a respiratory fraction as hazardous, regardless of whether there is any evidence to support such categorisation. Unfortunately, for many of the applications for which inorganic fibres are used, there are no realistic substitutes.

Accordingly there is an industry and regulatory demand for inorganic fibres that will pose as little risk as possible (if any) and for which there are objective grounds to believe them safe.

A line of study has proposed that if inorganic fibres were made that were sufficiently soluble in physiological fluids that their residence time in the human body was short; then damage would not occur or at least be minimised. As the risk of asbestos linked disease appears to depend very much on the length of exposure this idea appears reasonable. Asbestos is extremely insoluble.

As intercellular fluid is saline in nature the importance of fibre solubility in saline solution has long been recognised. If fibres are soluble in physiological saline solution then, provided the dissolved components are not toxic, these fibres should be safer than fibres that are not so soluble. Accordingly, in recent years, a number of different types of fibre have been proposed which are refractory and yet soluble in body fluids. Such fibres comprise alkaline earth silicates (e.g. WO87/05007, WO89/12032, WO93/15028, WO94/15883, WO96/02478, and WO97/49643) which are soluble to varying extent in body fluids.

A problem with saline soluble fibres is that by their nature they are more reactive than RCF and therefore cannot always be used as a direct replacement for RCF. The applicants have found that one aspect of this reactivity is that the performance of materials at temperatures in excess of 1100°C is extremely adversely affected by the presence of aluminium in the binders and fillers conventionally used with RCF. The applicants speculate that this adverse effect is due to a eutectic composition that has been reported to lie at about 1238°C in the CaO-Al<sub>2</sub>O<sub>3</sub>-MgO-SiO<sub>2</sub> phase field.

The applicants have further found that sodium and boron badly affect performance of fibres above 1200°C.

Accordingly the present invention provides a composite material comprising bonded alkaline earth silicate fibres in which any bonding agents or fillers comprise low amounts of aluminium so that the composite material comprises less than 1% aluminium expressed as  $\text{Al}_2\text{O}_3$ . Preferably the composite material comprises less than 0.5% by weight of aluminium expressed as  $\text{Al}_2\text{O}_3$ . More preferably the composite material comprises less than 0.1% by weight of aluminium expressed as  $\text{Al}_2\text{O}_3$ . Yet more preferably the composite material is essentially free of aluminium.

In a further feature the composite material comprises less than 1%, preferably less than 0.5%, more preferably less than 0.1% by weight of sodium expressed as  $\text{Na}_2\text{O}$  and is still more preferably essentially free of sodium.

In a still further feature the composite material comprises less than 0.5% by weight of boron, preferably less than 0.1% of boron expressed as  $\text{B}_2\text{O}_3$ .

Further features of the invention are apparent from the claims and the following description, which refers to various applications in which the invention is applicable.

#### Insulation board and shapes.

The invention can be illustrated in its broadest concept by reference to Table 1 which indicate the results of making board using alkaline earth silicate fibres of the SUPERWOOL™ 612™ composition (available from Thermal Ceramics de France SA or Thermal Ceramics Limited). Such fibres have a nominal composition (by weight) of  $\text{SiO}_2$  64%,  $\text{CaO}$  17%,  $\text{MgO}$  13.5%,  $\text{ZrO}_2$  5%, and impurities < 0.5%, and are usable at temperatures in excess of 1200°C and up to 1250°C.

Boards and some shapes are conventionally made by first formulating a suspension of fibre with a cationic organic binder such as a starch and an anionic inorganic binder such as colloidal silica. The cationic organic binder and anionic inorganic binder flocculate, drawing the fibre into a flocculated suspension.



The suspension is placed in contact with mesh moulds and vacuum is applied to the moulds to vacuum form articles either on the outside of the mesh (male mould) or on the inside of the mesh (female mould). Vacuum is applied to the mould until a sufficient thickness of fibre has built up and the mould is then removed from the suspension, the vacuum remaining on for a little while to promote dewatering. This process produces a wet green article containing about 50%-70% water.

At this stage the product is extremely fragile having the consistency of wet cardboard. The wet green article is dried, for example at a temperature of about 150°C and the organic binder then gives some handling strength. Relatively low amounts of inorganic binder are used in the formation of such materials. A typical recipe for use in vacuum forming would comprise 100kg of fibre, 25kg of colloidal silica (a 30% solution i.e. 7.5 kg dry weight), 6.5kg starch and 1000 gallons (approximately 4500 litres) water. The silica in this formulation amounts to about 0.16% of the suspension formulation and about 7% of the dry materials.

When first fired by the end user of the shape or board the organic binder burns off and the inorganic binder binds the fibres.

Recipes 1, 2 and 3 of Table 1 were tested in the discontinuous manufacture of special shapes. As can be seen Recipe 1 of Table 1 melts at 1250°C due to the presence of aluminium in the clay. The aluminium reacts with the CaO, MgO, and SiO<sub>2</sub> of the fibre to form a eutectic mixture. Although Recipe 1 failed at temperature Recipes 2 and 3 appear to give similar results. Recipes 4 to 10 were tested in the continuous manufacture of board.

Recipe 4 refers to Table 2 to show the effect of aluminium compounds (as aluminium sulphate present in re-cycled wastewater) on high temperature behaviour. This appears to be extremely detrimental.

Recipes 5 and 6 show the effect of adding talc as filler. This appears to improve modulus of rupture and compressive strength. Recipes 5, 7 and 8 allow comparison with other fillers, talc giving the best result.

Recipes 5, 9 and 10 allow comparison of the variation of the amount of colloidal silica. Recipe 9 appears the best.

TABLE 1

Recipe	1	2	3	4	5	6	7	8	9	10
Fibre	64.0%	73.3%	76.1%	80.3%	78.1%	75.2%	78.1%	78.1%	76.0%	74.1%
Clay	24%									
Talc			14.2%	15.0%	14.6%	17.5%			13.2%	11.8%
Wollastonite								14.6%		
Fumed Silica							14.6%			
Colloidal silica	7.0%	22.8%	6.3%		3.9%	3.9%	3.9%	3.9%	7.6%	11.1%
Cationic Starch	5.0%	3.9%	2.8%							
Starch				4.1%	2.9%	2.9%	2.9%	2.9%	2.8%	2.7%
Xanthan gum			0.6%	0.6%	0.5%	0.5%	0.5%	0.5%	0.4%	0.3%
Density	313	320	277	305	316	320	304	313	307	296
Modulus of rupture by bending (MPa)	1.4	0.69	1.2	0.9	0.75	0.87	0.78	0.73	1.26	1.22
M.O.R. at 1150°C				0.04						
M.O.R. at 1200°C				N.A.	0.2	0.24	0.16	0.11	0.77	0.68
M.O.R. at 1250°C					0.3	0.39	0.15	N.A.	N.A.	N.A.
Loss on ignition at 800°C	5.2	4.5	4.2	3.6	3.6	3.6	3.4	3.4	3.4	3.6
Linear shrinkage 24h -1200°C (%)				see Table 2	2.1	2	2.3	1.9	2.6	2.6
Linear shrinkage 24h -1250°C (%)	melted	2.1	1.2		2.3	2.2	2.5	N.A.	N.A.	N.A.
Compressive strength @ 10%				0.22	0.13	0.15	0.13	0.12	0.22	0.24
Compressive Strength at 1150°C for 10% (MPa)				0.1						
Compressive Strength at 1200°C for 10% (MPa)				N.A.	0.07	0.09	0.05	0.03	0.20	0.19

TABLE 2					
Al <sub>2</sub> O <sub>3</sub> content (%)	10.2	6.7	6.3	5.1	0.4
Shrinkage at 1150°C - 24 hours	melted	1.8	1.7	1.6	
Shrinkage at 1200°C - 24 hours	melted	glazed	glazed	glazed	2.3

The recipes of Table 1 resulted in boards having the composition set out in Table 3.

TABLE 3										
Recipe	1	2	3	4	5	6	7	8	9	10
Fibre	67.3%	87.2%	79.7%	80.3%	80.3%	77.3%	80.3%	80.3%	80.3%	80.3%
Clay	25.2%									
Talc			14.8%	15.0%	15.0%	18.0%			13.9%	12.8%
Wollastonite								15.0%		
Fumed Silica							15.0%			
Colloidal silica (30%)	2.2%	8.2%	2.0%		1.2%	1.2%	1.2%	1.2%	2.4%	3.6%
Cationic Starch	5.3%	4.6%	2.9%							
Starch				4.1%	3.0%	3.0%	3.0%	3.0%	3.0%	3.0%
Xanthan gum			0.6%	0.6%	0.5%	0.5%	0.5%	0.5%	0.4%	0.3%

- 5 A typical and useful range of ingredients for making insulating board and shapes by vacuum forming is (in weight percent):-

	Alkaline earth metal silicate fibre	70-85%
	Colloidal silica (30% SiO <sub>2</sub> by weight)	3-25%
10	Organic binder	1-6%
	Filler	11-20%

and from such ingredients typical and useful compositions in the finished board are:-

Alkaline earth metal silicate fibre	70-90%
Colloidal silica (30% SiO <sub>2</sub> by weight)	1-10%
Organic binder	1-6%
Filler	11-20%

5

The examples given above have compositions in the range:-

Alkaline earth metal silicate fibre	77.3-87.2%
Colloidal silica (30% SiO <sub>2</sub> by weight)	1.2-8.2%
10 Organic binder	3.3-4.7%
Filler	12.8-18%

15

In all of the above tested compositions the colloidal silica used was Nyacol™ 1430 which has a sodium content of about 0.4% by weight. The amount of colloidal silica binder present was sufficiently low (3.9-22.8% by weight of the colloidal silica translating as approximately 1.2-7 wt% silica binder in the finished product) that the sodium in the binder did not have an appreciable deleterious effect on the properties of the material.

### Papers

20

The same principles apply in the manufacture of papers. In the conventional manufacture of refractory paper slurry is made in like manner to vacuum forming and is cast upon a wire former as in paper making machinery.

25

The normal flocculant used is alum. The applicants have been able to make refractory fibre paper using acrylic latex binders and an organic flocculant. Such papers have been tested to 1250°C and while collapsing at 1200°C the fibres remain in place providing some insulating effect. In contrast, if alum is used as a flocculating agent the paper melts.

30

A typical recipe (by weight percent) for the paper is:-

SUPERWOOL™ 612™	90-95%
Acrylic latex (PRIMAL HA8™ from Rohm & Haas)	5-10%
Organic flocculants	<1%

Suitable organic flocculants comprise the PERCOL L Series™ from Allied Colloids. These are polyacrylamide based products. In particular PERCOL 230L works well.

Fire beds, artificial coals, and fire shapes.

5

Articles that are directly exposed to flames are in an aggressive environment with temperatures in excess of 1000°C and exposure to combustion products. Use of conventional binders with alkaline earth metal silicate fibres (SUPERWOOL™ 612™) led to cracking of shapes. The applicants tested a series of compositions by making pieces using different colloidal silica binders each present at the same amount (about 6% by weight). These pieces were heated to 1000°C for one hour and assessed for cracking, friability, and hardness (Shore 'o'). The results of these tests are given in Table 4 below:-

10

TABLE 4							
Colloid	pH	Na <sub>2</sub> O (wt%)	Specific Surface Area (m <sup>2</sup> /g)	Silica (wt%)	Cracking	Friability	Hardness
Nyacol™ 1430	10.2	0.4	230	30	Bad fracturing	Friable	10-17
Syton™ X30	9.9	0.3	250	30	Some fracture	Fibrous	57
Levasil™ 200-A-30	6.5	0.17	200	30	Minor fracture	Friable	40
Bindzil™ 40/220	9.7	0.42	220	40	Some fracture	Friable	40
Bindzil™ 30NH <sub>3</sub> /220	9.5	<0.1	220	30	Some fracture	Fibrous	47

15 From this it was deduced that:-

- Alkaline pHs were associated with fractured pieces and could be indicative of poor thermal shock resistance; and
- A reduction in Na<sub>2</sub>O content appears to correlate with friability of the product.

Accordingly, and in view of the growing perception that aluminium, sodium and boron are detrimental to the high temperature performances of alkaline earth metal silicate fibres, the applicants requested their suppliers of colloid (Univar of Croydon, England - distributors for Akzo Nobel) to supply colloidal silica meeting the following requirements not usually called for commercially:-

- a) The colloidal silica should have a slightly acid to roughly neutral pH, preferably in the range 6.5 to 7.5
- b) The soda content of the colloidal silica should be low, preferably below 0.1wt%
- c) The silica should not have appreciable amounts of aluminium present.

A preliminary experimental product supplied under the reference Bindzil 30/220LPN comprised 30wt% silica, had a pH of 7.0 and comprised 0.08wt% Na<sub>2</sub>O. The same trial as above was repeated using this silica and a product was produced which did not crack and remained fibrous with a Shore 'o' hardness of 50. Further samples were made and subjected to a 250 hours cycling test (2 hours on and 2 hours off under gas flame) and passed this test.

Preliminary specifications for the typical colloidal silicas usable to achieve these results are:-

SiO <sub>2</sub> content (by weight)	30	25
Viscosity	<10cP	<10cP
pH	6.5 - 8.0	6.5 - 8.0
Specific Surface Area (m <sup>2</sup> /g)	220 - 240	220 - 240
Density (g/cm <sup>3</sup> )	1.192-1.199	1.155-1.175
Na <sub>2</sub> O content (by weight)	<0.1	<0.1

Such silicas are obtainable from Akzo Nobel under the reference Bindzil 30/220LPN or the mark THERMOSOL™.

A typical mixture for use in the manufacture of fire shapes comprises:-

Fibre (e.g. SUPERWOOL 612™)	60 parts by weight
Colloidal silica (e.g. THERMOSOL™ Bindzil 30/220LPN [30%by weight SiO <sub>2</sub> ])	12 - 14 parts by weight
Starch (e.g. PLV available from Avebe, Netherlands)	2.5 parts by weight

The amount of water used in forming the slurry varies according to application but may for example range from 2700-4500 litres (600-1000 gallons). The fibre typically represents about 0.5-4% by weight of fibre in water. Not all of the ingredients will be incorporated into a vacuum formed product formed from this mixture but typically such a mixture leads to a product comprising approximately 6% by weight colloidal silica, 3.5-5% starch with the balance fibre. The tolerable range for colloidal silica is usually from about 4% to about 9% by weight in the finished product.

- 10 Alternative compositions excluding organic binders (useful for such high temperature applications as cooker rings) may be made for example from slurry compositions 1 and 2 below:-

Component	COMPOSITION 1	COMPOSITION 2
"White water" component	50-80% by volume of 30% solids THERMOSOL™ =Bindzil 30/220LPN with 20-50% by volume mains water	90-100% by volume of 30% solids THERMOSOL™ =Bindzil 30/220LPN with 10-0% by volume mains water
Fibre (SUPERWOOL™ 612)	0.5-4% by weight of solids to white water component	2-3% by weight of solids to white water component

Such slurry compositions lead to products comprising 15-30% by weight silica with the balance fibre.

The above materials described for fire shapes and artificial coals can also be used in wider applications such as boards and shapes.

From the above results it can be seen that where the amount of binder used is high the amount of sodium in the binder is best kept low. Similar considerations apply for boron. It should be noted that some colloidal silicas contain aluminium as a counter-ion and such colloidal silicas should be avoided.



CLAIMS

5

1. A composite material comprising bonded alkaline earth silicate fibres in which any bonding agents or fillers comprise low amounts of aluminium so that the composite material comprises less than 1% by weight aluminium expressed as  $\text{Al}_2\text{O}_3$ .

10

2. A composite material as claimed in claim 1 in which composite material comprises less than 0.5% by weight by weight of aluminium expressed as  $\text{Al}_2\text{O}_3$ .

3. A composite material as claimed in claim 2 in which the composite material comprises less than 0.1% by weight by weight of aluminium expressed as  $\text{Al}_2\text{O}_3$ .

15

4. A composite material as claimed in claim 1 in which the composite material is essentially free of aluminium.

20

5. A composite material as claimed in any preceding claim and comprising less than 1% by weight sodium expressed as  $\text{Na}_2\text{O}$ .

6. A composite material as claimed in claim 5 and comprising less than 0.5% by weight sodium expressed as  $\text{Na}_2\text{O}$ .

25

7. A composite material as claimed in claim 6 and comprising less than 0.1% by weight sodium expressed as  $\text{Na}_2\text{O}$ .

8. A composite material as claimed in any preceding claim and in which the composite material is essentially free of sodium.

30

9. A composite material as claimed in any preceding claim and comprising less than 0.5% by weight boron expressed as  $\text{B}_2\text{O}_3$ .

10. A composite material as claimed in claim 9 and comprising less than 0.1% by weight boron expressed as  $B_2O_3$ .

11. A composite material as claimed in any preceding claim in which the alkaline earth silicate fibre is itself capable of use without excessive shrinkage at temperatures in excess of 1200°C.

12. A composite material as claimed in any preceding claim in which the material is obtainable by vacuum forming from a slurry containing the following ingredients (in weight %):-

Alkaline earth metal silicate fibre	70-85%
Colloidal silica (30% $SiO_2$ by weight)	3-25%
Organic binder	1-6%
Filler	11-20%

13. A composite material as claimed in claim 12 comprising:-

Alkaline earth metal silicate fibre	70-90%
Colloidal silica (30% $SiO_2$ by weight)	1-10%
Organic binder	1-6%
Filler	11-20%

14. A composite material as claimed in claim 13 comprising:-

Alkaline earth metal silicate fibre	77.3-87.2%
Colloidal silica (30% $SiO_2$ by weight)	1.2-8.2%
Organic binder	3.3-4.7%
Filler	12.8-18%

15. A composite material as claimed in any of claims 1 to 11 in which the material is a paper comprising:-

Alkaline earth metal silicate fibre	90-95%
Organic binder	5-10%
Organic flocculants	<1%

16. A composite material as claimed in claim 15 in which the organic binder is an acrylic latex.

- 10 17. A composite material as claimed in any of claims 1 to 11 in which the material is a material obtainable by vacuum forming from the ingredients:

Alkaline earth silicate fibre	60 parts by weight
Colloidal silica (30%by weight $\text{SiO}_2$ )	12 - 14 parts by weight
Starch	2.5 parts by weight

and in which the colloidal silica has a pH of less than 8.

- 15 18. A composite material as claimed in claim 17 and comprising 4-9% by weight colloidal silica, 3.5-5% starch, balance alkaline earth silicate fibre.

19. A composite material as claimed in claim 18 comprising about 6% colloidal silica.

- 20 20. A composite material as claimed in any of claims 1 to 11 in which the material is a material obtainable by vacuum forming from the ingredients:-

"White water" component	50-80% by volume of 30% solids colloidal silica with 20-50% by volume mains water
Alkaline earth metal silicate fibre component	0.5-4% by weight of solids to white water

and in which the colloidal silica has a pH of less than 8.

21. A composite material as claimed in any of claims 1 to 11 in which the material is a material obtainable by vacuum forming from the ingredients:-

"White water"                      90-100% by volume of 30% solids colloidal silica  
component                              with 10-0% by volume mains water

Alkaline earth metal                2-3% by weight of solids to white water  
silicate fibre                              component

and in which the colloidal silica has a pH of less than 8.

5

22. A composite material as claimed in claim 20 or claim 21 and which comprises 15-30% by weight colloidal silica, balance fibre.